

Data sheet

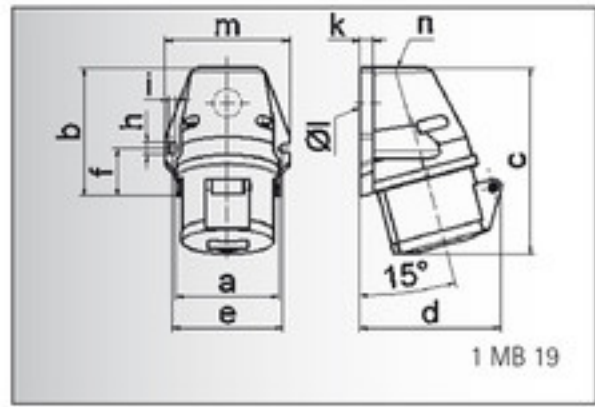
Order number: 101

GT wall mounting socket outlet

EAN/pcs	4024941001014
Ampere	32A
Poles	5p (3p+N+PE)
Earth 'Clock' Position	6 h
Voltage	200/346 up to 240/415V
Frequency	50 and 60Hz
Protection	IP44
Color code	red RAL 3000
Connection Design	screw terminal
Contact	contact carrier made of polyamide, the contacts are brass
Weight/pcs	0.310 kg
Packaging unit	10 pc/pcs
Material of Enclosure	Polyamide



The cable entry is one at top open and one at bottom closed

	Ampere	16	16	16	32	32	32
	Polzahl	3	4	5	3	4	5
	a	59,5	72,4	72,4	79,1	79,1	79,1
	b	90,0	90,0	90,0	92,0	92,0	92,0
	c	130,0	130,0	131,0	142,0	142,0	142,0
	d	85,0	96,0	98,0	103,0	103,0	106,0
	e	62,0	77,0	77,0	84,0	84,0	84,0
	f	33,5	33,5	33,5	30,0	30,0	30,0
	h	9,0	9,0	9,0	9,0	9,0	9,0
	i	5,5	5,5	5,5	5,5	5,5	5,5
	k	8,0	9,0	9,0	9,0	9,0	9,0
	l ø	21,0	21,0	21,0	21,0	21,0	21,0
	m	72,0	87,0	87,0	94,0	94,0	94,0
	n	M 20	M 25	M 25	M 25	M 25	M 25
	Leiter mm² min	1,5	1,5	1,5	2,5	2,5	2,5
	Leiter mm² max	4	4	4	10	10	10

Bals Elektrotechnik GmbH & Co. KG

D-57399 Kirchhundem - Albaum

phone: +49(0)2723/771-0 fax: +49(0)2723/771-177

email: info@bals.com www.bals.com

Date: 24.06.2016